



Relcross Ltd, Hambleton Avenue, Devizes, Wiltshire, SN10 2RT  
Tel: 01380 729 600 Fax:01380 729 888  
Web: [www.relcross.co.uk](http://www.relcross.co.uk) E-mail: [sales@relcross.co.uk](mailto:sales@relcross.co.uk)

## **New Enhanced Power Supplies**

### **PS01 ACC 1 & 2 air controller – 12 V DC - 2.0 Amp Installation**

#### **INSTALLATION WARNING – This equipment MUST BE EARTHED**

**The enclosure must be fixed to a vertical flat surface at a maximum ambient temperature of 45 degrees C in a well ventilated area**  
**This power supply must be installed in accordance with the current IEE regulations covering low voltage power supplies complying with the low voltage directive SI 1994 No 3260 73/23/EEC (LVD)**

#### **Features:**

- Two stage current protection.
- Short circuit protection.
- Thermal overload protection.
- Constant voltage regulation.
- Mains failure or low battery voltage warning, user selectable
- Fire relay interface to fire alarm system.
- Enclosure door 3 LED status indicators.
- PCB mounted engineering status LED indicators, show:
  - Over current
  - Fire alarm relay status
- Battery management electronics providing:
  - Low voltage trip to disconnect battery and extend battery life.
  - Reverse battery polarity protection.

#### **Description:**

##### **First stage current protection**

If the load exceeds the power supply current rating, an electronic sensor detects this overload and folds the voltage back to 11.5 volts and provides current limiting, this is indicated by the red overload LED on the circuit board.

##### **Second stage current protection**

A short circuit or severe overload will shut down the regulator & output voltage will be zero until the fault is removed.

##### **Battery management, if battery fitted**

Under normal conditions, the battery floats at 13.8 Volts. If the mains power fails, the battery takes the load. Eventually the voltage will drop to 10.5 volts & a relay disconnects the battery, this is automatically reset once the mains has been re-energised. This feature extends battery life by preventing deep discharging and prevents equipment malfunction.

##### **User selectable warning voltage free relay contacts**

The electronic voltage detection circuit is configured by selecting a link switch on the PCB for either: MF - Mains failure or LB - Low battery 11.5 volts .

##### **Fire control relay**

Terminals FR & FR (Fire relay) can be connected to a voltage free fire system and or access control system. Relay operation is indicated via the external yellow LED. If the fire relay is used, the positive supply is from either +NC (normally closed) and/or +NO (normally open) depending on desired relay operation.

**Cabinet dimensions in mm: 325H \* 255W \* 90D**



## New Enhanced Power Supplies

### Commissioning tests

#### Initial installation test

##### Prerequisites:

- Disconnect battery – if supplied with battery
- Disconnect all supplied equipment
- Place the handbag link to LB low battery (on PCB).

#### Test procedure

Switch on mains power; the following indicators should be illuminated:

- Red and Green – on the front panel
- Green on the PCB

#### Fire alarm relay

Switch off mains power & connect a link between terminals FR & FR  
Switch on mains power – the yellow LED on front panel should now be lit,  
Connect a meter between terminals 0V & +NO - this should be live at PSU output voltage

Switch off mains power & remove the link between terminals FR & FR, switch on mains power and connect a meter between terminals 0V & +NO which should be live at PSU output voltage. Observe LEDs switch off in the following sequence: Red then green on PCB then green on front panel last

#### Battery functionality – optional if fitted

Switch off mains power & connect the battery, place handbag link to MF (mains failure) switch on mains power, then switch off. The power supply is now running on the battery, note the green LED on PCB will be off but the green LED on the front panel will be on. The relay contacts WNO to WNC will change over

**Tests with the load connected – battery not connected (if supplied):** With the load connected, switch on the mains. The following LEDs should be on: red & green on front panel, green on PCB and yellow if using relay FR, this indicates the test & the power supply loading is correct.

If only the red LED is illuminated there is a short circuit with the load connected. If red, & green on the front panel with green and red (over load) on the PCB illuminated the connected load has exceeded the power supply rated output & must be reduced.

| Front panel LED      | PCB LED        | Means   |
|----------------------|----------------|---|
| Red + Green          | None           | Normal operation                                  |
| Red + Green + Yellow | None           | Normal operation with fire relay energised        |
| Green                | Green if MFW * | Power supply on battery                           |
| Green + Yellow       | Green if MFW * | Power supply on battery with fire relay energised |
| Red only             | None           | Dead short on output                              |
| Red + Green          | Red            | Current rating exceeded                           |

\* MFW – mains failure warning if configured




## New Enhanced Power Supplies

### Connections

Positive and negative is supplied from +NS & 0V for fire alarm and relay connection options see diagram below

Note: positive connections to equipment shown for clarity

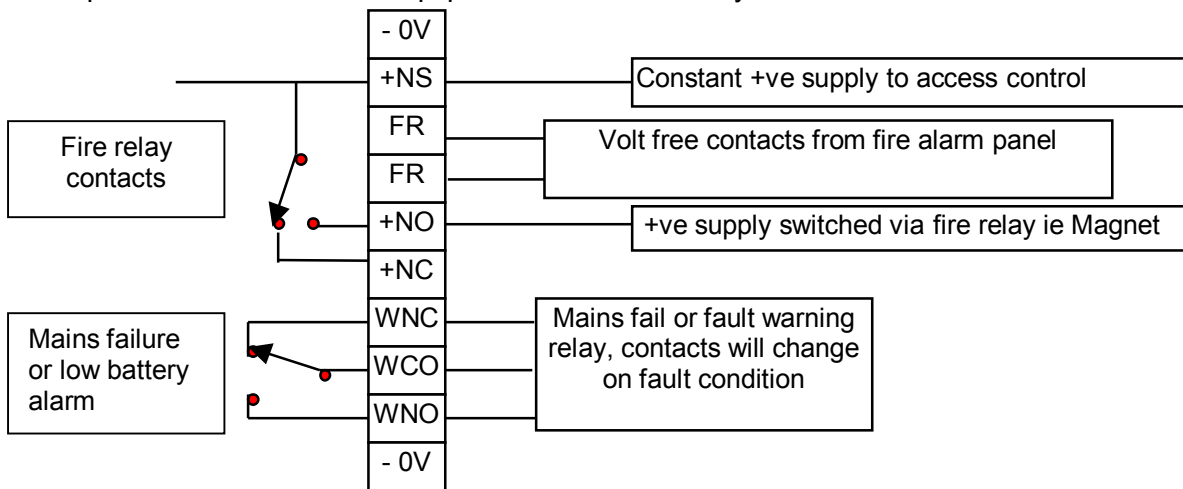

Relays shown in de-energised state

