


# KEYLEX 2100

# MECHANICAL DIGITAL LOCK


# INSTALLATION & TEMPLATE

## ASSEMBLING THE LOCK

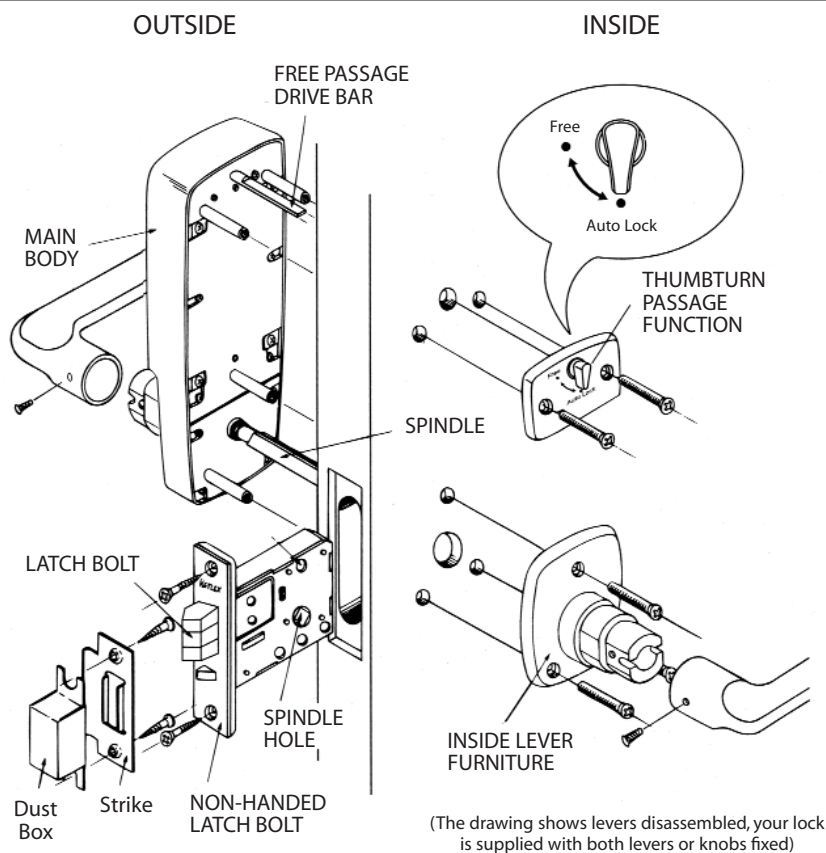

- INSTALLATION**
1. PREPARE THE DOOR IN ACCORDANCE WITH THE TEMPLATE. ENSURE THAT YOU MAKE THE CORRECT CHOICE OF BACKSET LENGTH. CHECK THIS CAREFULLY AGAINST THE LATCH PROVIDED.
  2. INSTALL THE LATCH BOLT AND STRIKE PRIOR TO INSTALLING THE MAIN LOCK BODY.
  3. MOUNT OUTSIDE LOCK BODY AS SHOWN AT EACH OF THE FIVE POINTS.
  4. REFER TO THE SUPPLEMENTARY SHEET FOR CODE TESTING. ENSURE THAT THE CODE IS TESTED AND THAT THE LOCK WORKS SATISFACTORILY BEFORE ALLOWING THE DOOR TO CLOSE.
  5. PLEASE REFER TO THE SUPPLEMENTARY SHEET FOR AN EXPLANATION OF THE PASSAGE FUNCTION OPERATION.


## HANDING THE LEVER

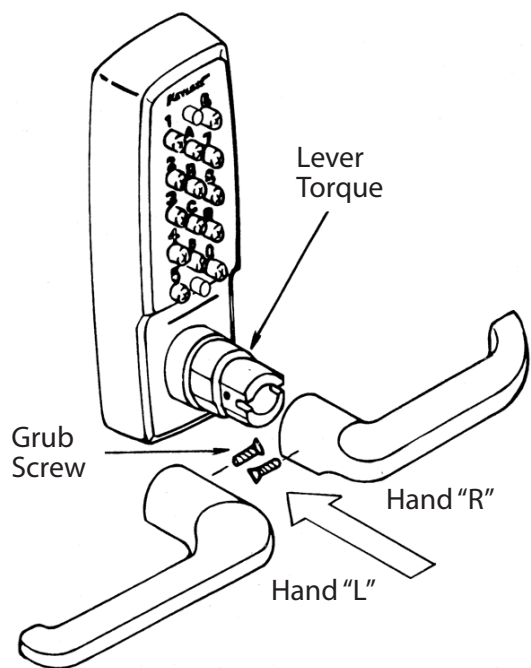

Establish the correct hand of the door. If necessary, flip the lever to accommodate your choice. You will need to remove the grub screw in order to do this.

fold here for 76mm Backset

fold here for 60mm Backset

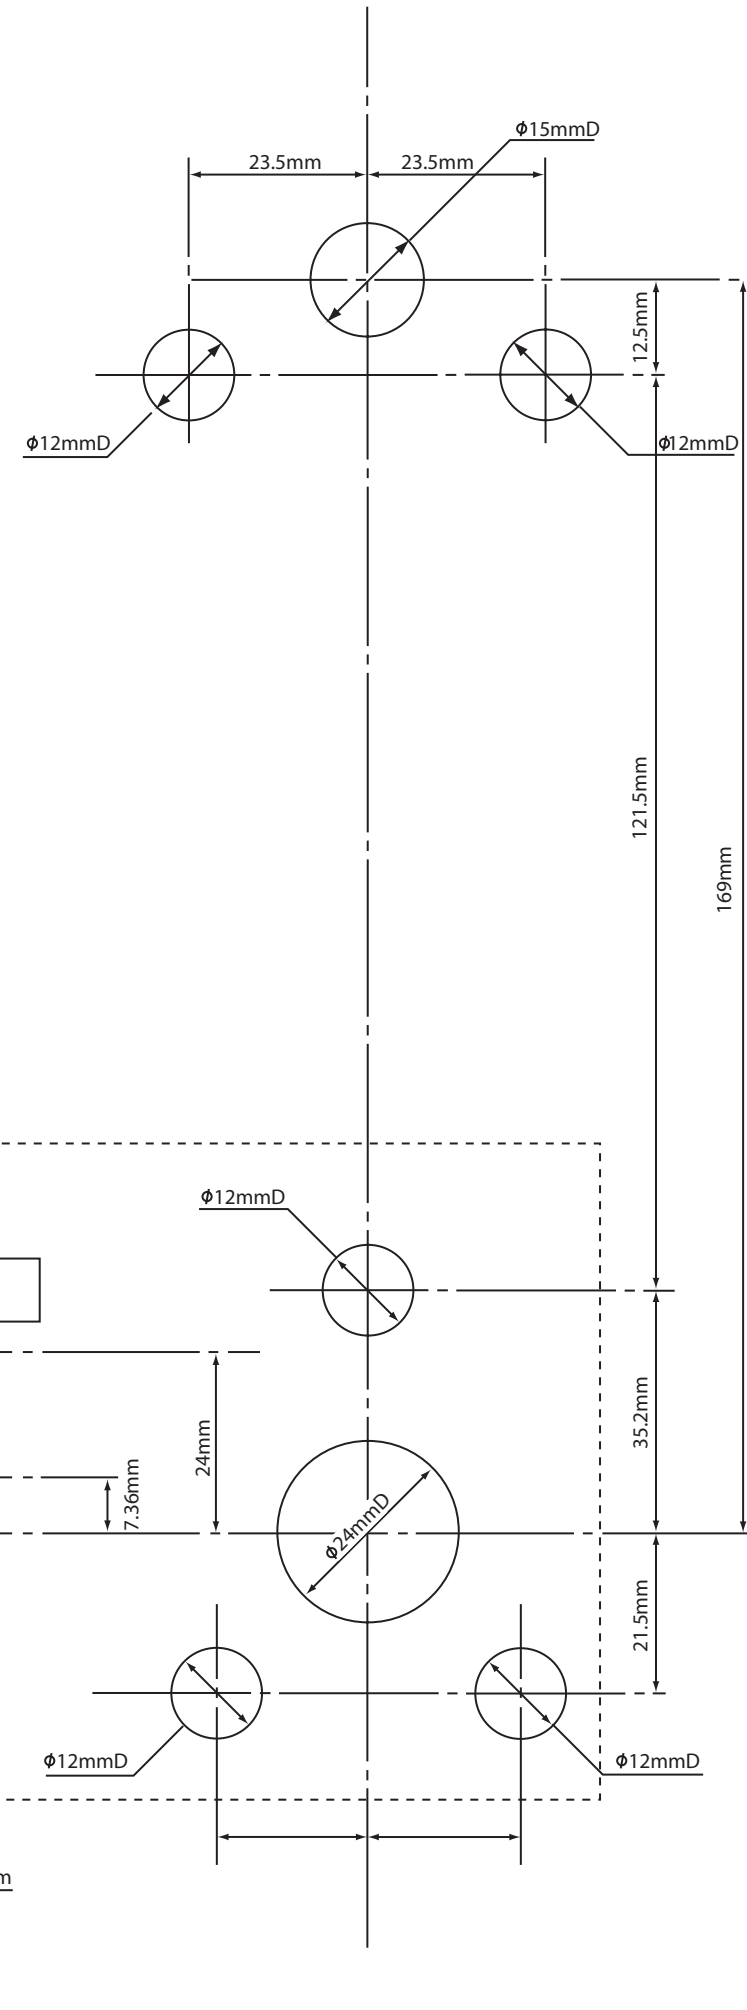

## FOR METAL FRAMED DOORS, USE THE FOLLOWING DIMENSIONS

