


Securitron® M62 Magnalock®

1,200 lbs holding force
direct mounted Magnalock

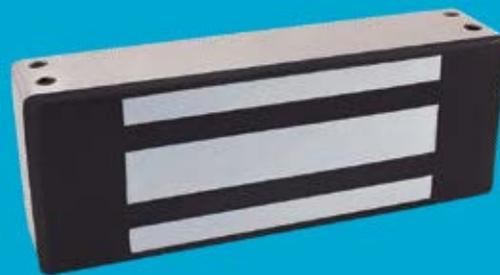

The ultimate in Magnalock versatility for indoor/outdoor higher security.

The M62 is a strong, easy-to-maintain solution for interior, perimeter and exterior access control. With unsurpassed durability, the M62 will last long after most buildings wear out. Flexible mounting options support applications for hollow metal, concrete filled metal, wood, or glass with aluminum frames, and Herculite doors. Options include single and double door configurations, or specialty applications such as gates and fences.

Features

Standard Features

- PoE friendly
- Sustainability documentation
- Efficient, low power usage
- Automatic dual-voltage—no field adjustment required
- Fully sealed for weatherproof operations
- Size optimized for use with door closers
- Rust resistant—all ferrous metal surfaces plated for durability
- Instant release circuit—no residual magnetism
- Noise suppression with included MOV
- 10 ft [3.05m] of jacketed, stranded conductor cable
- Ultra-secure collapsing blind nuts mount to door frame for strength and reliability
- MagnaCare® lifetime replacement, no fault, no questions asked warranty

Optional Features

- **F** Face drilled
- **G** Gate conduit
- **B** Patented BondSTAT magnetic bond sensor
- **D** Integrated Door Position Switch (DPS)
- **SS** Split Strike
- **SASM** Shock Absorbing Strike Mount for Gates
- **OS** Offset Strike



Grade 2


MagnaCare
WarrantyAuto Sensing
Dual Voltage
12/24PoE
Friendly

Fire Rated

Outdoor
Rated

Preload

Dimensions

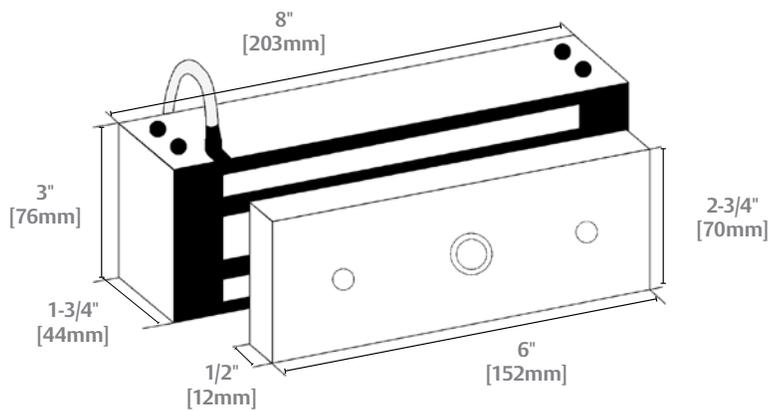

Specifications

Certifications

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA A156.23, Grade 2; E08501-1000
- CSFM—California State Fire Marshal Approved
- CE:EN 50081-1(92), EN 61000-6-2(99) Approved
- Environmental Product Declaration
- Health Product Declaration

Dimensions

- **Magnalock:** 8"L x 1-3/4"D x 3"H
- **Strike:** 6"L x 1/2"D x 2-3/4"H

Electrical

- 250 mA @ 12 VDC
- 150 mA @ 24 VDC

Holding Force

- 1,200 lbs. [544kg]

Operating Temperature

- -40 to +140F [-40 to +60C]
- Indoor or Outdoor use

Shipping Weight

- 11 lbs [5kg]

How to Order

Model Series	Mounting Method	Monitoring Options	Strike Plate Options
M62	FG	BD	– OS
M62 1,200 lbs	(blank) Direct Mount	(blank) No Monitoring	(blank) Standard Strike
	F Face Drilled	B BondStat Monitor	OS Offset Strike
	G Gate Conduit (M62/M82 only)	D Door Position Switch	SS Split Strike
		BD BondStat and DPS	SASM Shock Absorbing Strike Mount