WILKA®
SCHLIESSTECHNIK

Mortice Locks
for Narrow Stile Hollow Metal Doors

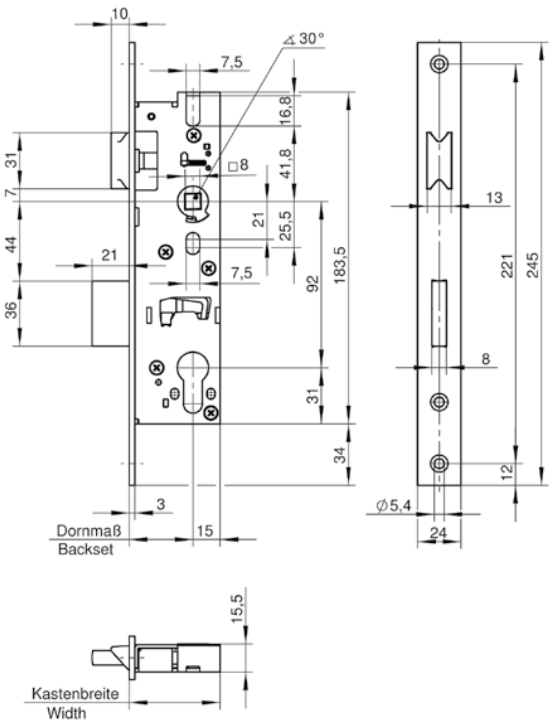

EN 12209

Art. No.		1438
Backsets	mm	25 30 35 40 45
Widths	mm	40 45 50 55 60

Mortise lock for metal frame doors, prepared for profile cylinder, fully zinc plated, solid follower 8 mm, with action of the key on the latch bolt, reversible latch for left and right hand use, 1 turn = 20 mm dead bolt throw, top and bottom of lock case closed, end-to-end screw holes.
Certified as per EN 12 209

Special designs

- latch and dead bolt extended 3 mm or 5 mm
- forend stainless steel, latch and dead bolt nickel-plated
- forend 16 mm, 20 mm or 22 mm
- U-shaped forend 22 mm or 24 mm
- refurbishment forend
- prepared for RZ 22 (Swiss standard)
- dead bolt monitoring device including 10 m cable
- follower monitoring device including 8 m cable
- follower 9 mm or 10 mm
- controlled latch bolt stop (from 30 mm backset)
- for burglar resistance doors according to EN 1627 class RC2 (only forend 22 mm and 24 mm, stainless steel)